


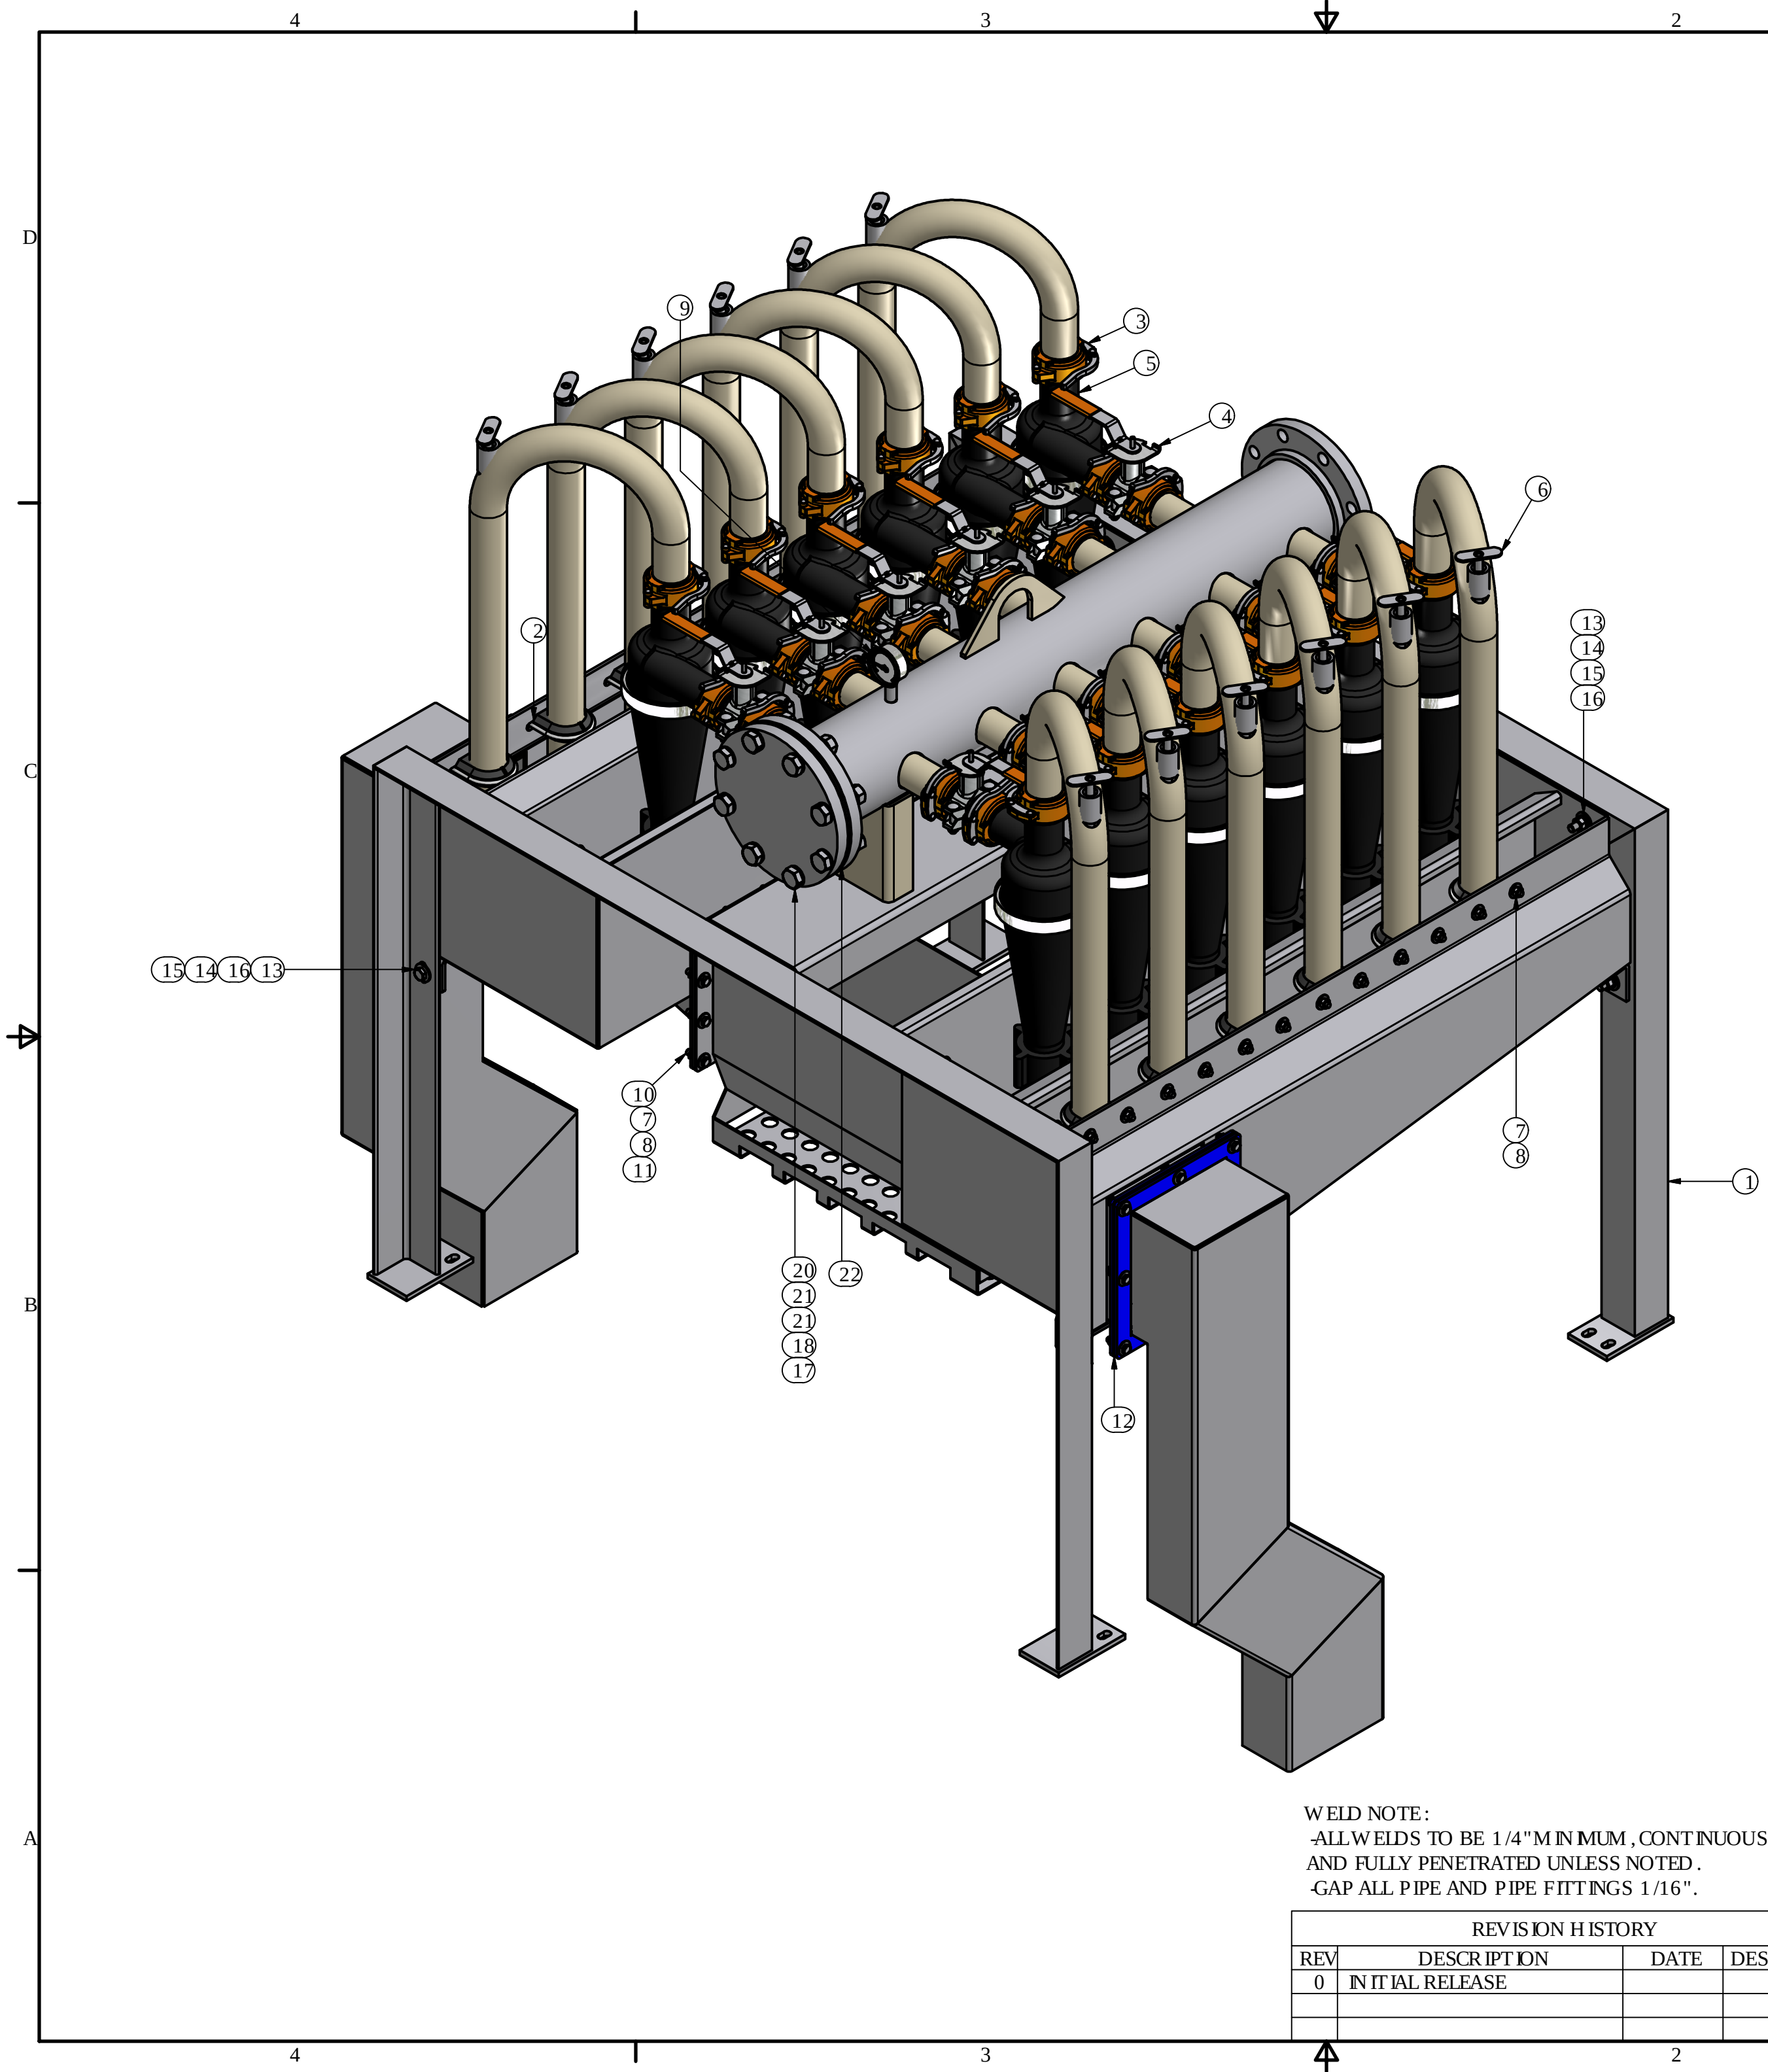

TRIFLO			
ITEM	ITEM QTY	DESCRIPTION	PART NUMBER
1	1	12-4 Weldment	12-00-036
2	12	2 in CANE CLAMP	00-02-047
3	36	COUPLING, 2" VIC STYLE 78	00-00-047
4	12	2 in VIC VALVE	00-00-876
5	12	4" CONE	03-00-044
6	12	CANE, 2" L/P NEW STYLE	12-00-037
7	74	Hex Nuts (Inch Series) Hex Nut	ANSI B18.2.2 - 3/8 - 16
8	124	Plain Washer (Inch)Type A and B	ANSI B18.22.1 - 3/8 - Regular - Type B
9	1	PRESSURE GAUGE	02-00-020
10	50	Hex Cap Screw	ANSI B18.2.1 - 3/8-16 UNC - 1.5
11	50	Regular Helical Spring Lock Washers(Inch Series)	ASME B18.21.1 - 3/8
12	2	12-4 DC GASKET	
13	16	Hex Cap Screw	ANSI B18.2.1 - 1/2-13 UNC - 1.75
14	16	Hex Nuts (Inch Series) Hex Nut	ANSI B18.2.2 - 1/2 - 13
15	16	Helical Spring Lock Washers	ANSI B18.21.1 - 0.5
16	32	Plain Washer (Inch)Type A and B	ANSI B18.22.1 - 1/2 - Regular - Type B
17	8	Hex Nuts (Inch Series) Hex Nut	ANSI B18.2.2 - 3/4 - 10
18	8	Regular Helical Spring Lock Washers(Inch Series)	ASME B18.21.1 - 3/4
20	8	Heavy Hex Bolt	ANSI B18.2.1 - 3/4-10 UNC - 3
21	16	Plain Washer (Inch)Type A and B	ANSI B18.22.1 - 3/4 - narrow - Type B
22	1	GASKET, 6 CUT RING 150#	00-00-998
24	1	12-4 -RIGHT-DC EXT	12-4 -RIGHT-DC EXT
25	1	12-4 -LEFT-DC EXT	12-4 -LEFT-DC EXT

TOTAL APPROX. WEIGHT: 1,250 LBS.
FLOW RATE: 780 GPM
25 PSI

WELD NOTE:
-ALL WELDS TO BE 1/4" MINIMUM, CONTINUOUS,
AND FULLY PENETRATED UNLESS NOTED.
-GAP ALL PIPE AND PIPE FITTINGS 1/16".

REVISION HISTORY			
REV	DESCRIPTION	DATE	DESIGNER
0	INITIAL RELEASE		

ISSUED FOR CONSTRUCTION		
DATE	JOB	APPROVED
12-00-035		
12-4 MUD CLEANER		
SIZE	DWG NO	REV
C	12-4-2014	0
SCALE	SHEET 1 OF 2	